

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/004486 A1

(51) International Patent Classification⁷: H04N 7/24,
7/20, 5/44, 5/00

(74) Agent: RUELLAN-LEMONNIER, Brigitte; 46 Quai
Alphonse Le Gallo, F-92648 BOULOGNE cedex (FR).

(21) International Application Number:
PCT/EP2004/051228

(22) International Filing Date: 24 June 2004 (24.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0307933 1 July 2003 (01.07.2003) FR

(71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46 Quai Alphonse Le Gallo, F-92100 BOULOGNE-BILLANCOURT (FR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): MONNIER, Raoul [FR/FR]; 9 rue Louis Pétri, F-35530 NOYAL-SUR-VILLEAINE (FR). SALOU, Frédérique [FR/FR]; La Gouranais, F-35850 GEVEZE (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF DEMODULATION IN AN STB

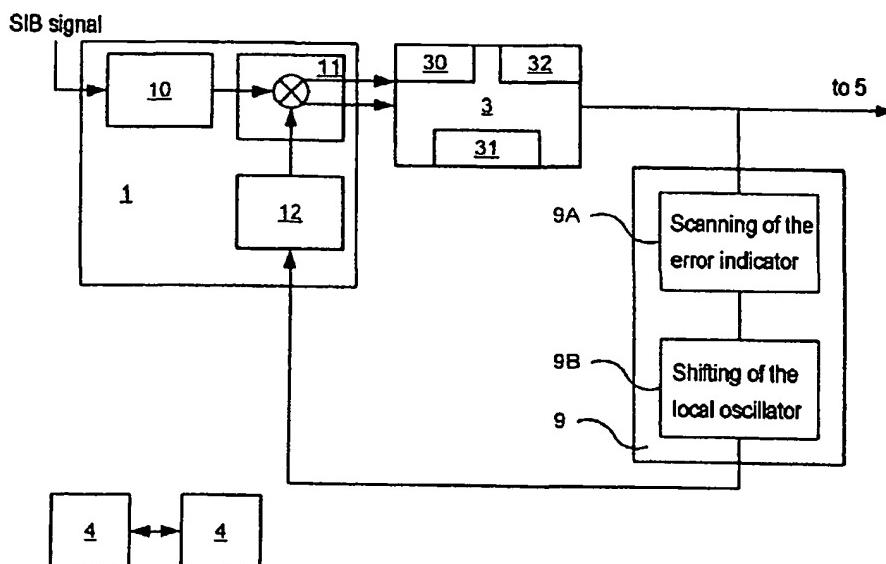

WO 2005/004486 A1

(57) Abstract: The method of demodulation in an STB comprising a tuner (1) including a local oscillator (12), a demodulator (3) situated downstream of the tuner (1) and a digital telephone base (4). In case of interference with the digital telephone base (4), the frequency of the local oscillator (12) of the tuner (1) is shifted by one or more synthesis intervals after scanning of an error indicator (32) situated in the demodulator (3). This method makes it possible to insert a digital telephone base into an STB while circumventing disturbances in the operation of the STB when this base is transmitting.



WO 2005/004486 A1



Published:

- with international search report*
- with amended claims*

Date of publication of the amended claims: 28 April 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



**(43) International Publication Date
13 January 2005 (13.01.2005)**

PCT

(10) International Publication Number
WO 2005/004486 A1

(51) International Patent Classification⁷:
7/20, 5/44, 5/00

H04N 7/24.

Agent: RUELLAN-LEMONNIER, Brigitte; 46 Quai Alphonse Le Gallo, F-92648 BOULOGNE cedex (FR).

(21) International Application Number:

PCT/EP2004/051228

(22) International Filing Date: 24 June 2004 (24.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 0307933 1 July 2003 (01.07.2003) FR

(71) **Applicant (for all designated States except US): THOM-SON LICENSING S.A. [FR/FR]; 46 Quai Alphonse Le Gallo, F-92100 BOULOGNE-BILLANCOURT (FR).**

(72) Inventors; and
(75) Inventors/Applicants (*for US only*): MONNIER, Raoul [FR/FR]; 9 rue Louis Pétri, F-35530 NOYAL-SUR-VILLE LAINE (FR). SALOU, Frédérique [FR/FR]; La Gouranais, F-35850 GEVEZE (FR).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD OF DEMODULATION IN AN STB

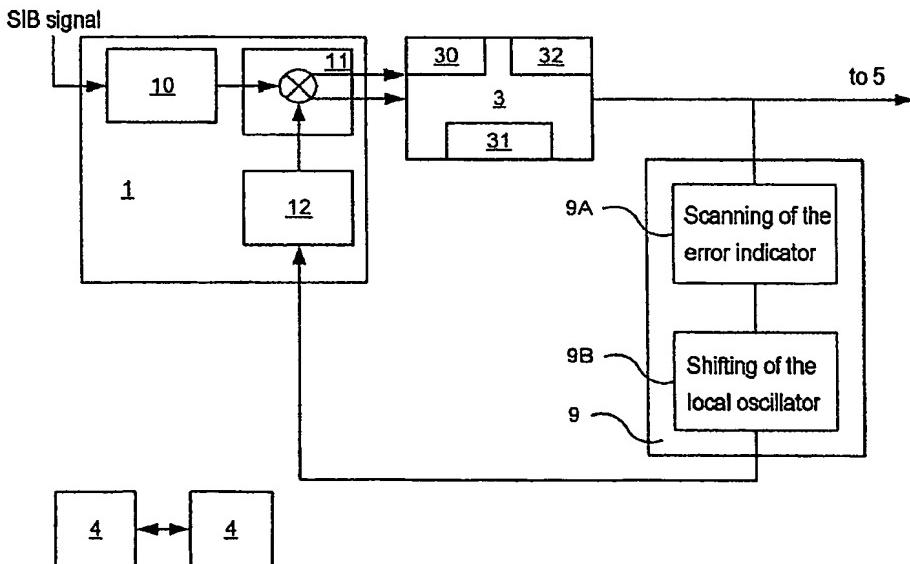

WO 2005/004486 A1

(57) Abstract: The method of demodulation in an STB comprising a tuner (1) including a local oscillator (12), a demodulator (3) situated downstream of the tuner (1) and a digital telephone base (4). In case of interference with the digital telephone base (4), the frequency of the local oscillator (12) of the tuner (1) is shifted by one or more synthesis intervals after scanning of an error indicator (32) situated in the demodulator (3). This method makes it possible to insert a digital telephone base into an STB while circumventing disturbances in the operation of the STB when this base is transmitting.



- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

REVISED VERSION

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)


PCT

(10) International Publication Number
WO 2005/004486 A1

- (51) International Patent Classification⁷: H04N 7/24, 7/20, 5/44, 5/00
- (74) Agent: RUELLAN-LEMONNIER, Brigitte; 46 Quai Alphonse Le Gallo, F-92648 BOULOGNE cedex (FR).
- (21) International Application Number: PCT/EP2004/051228
- (22) International Filing Date: 24 June 2004 (24.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0307933 1 July 2003 (01.07.2003) FR
- (71) Applicant (for all designated States except US): THOM-SON LICENSING S.A. [FR/FR]; 46 Quai Alphonse Le Gallo, F-92100 BOULOGNE-BILLANCOURT (FR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MONNIER, Raoul [FR/FR]; 9 rue Louis Pétri, F-35530 NOYAL-SUR-VILLEAINE (FR). SALOU, Frédérique [FR/FR]; La Gouran-tais, F-35850 GEVEZE (FR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF DEMODULATION IN AN STB

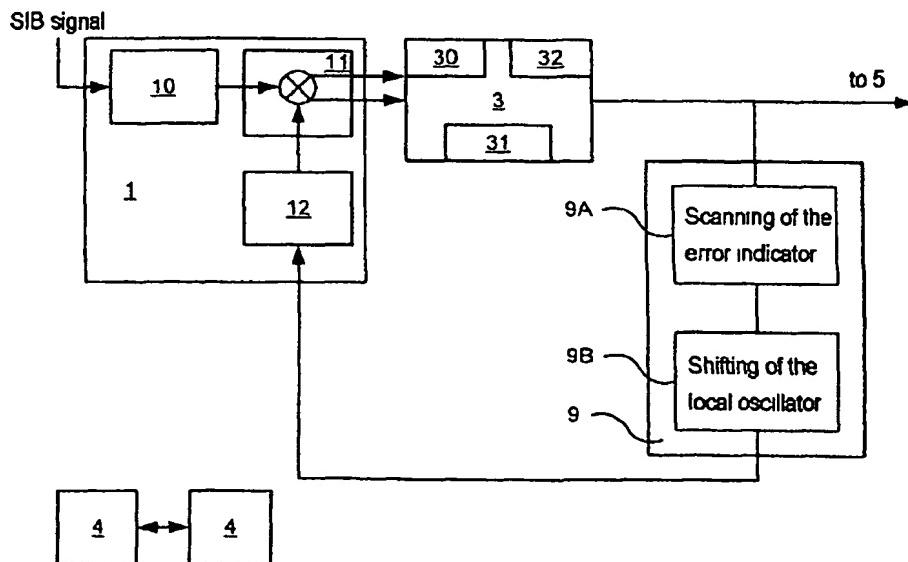

WO 2005/004486 A1

(57) Abstract: The method of demodulation in an STB comprising a tuner (1) including a local oscillator (12), a demodulator (3) situated downstream of the tuner (1) and a digital telephone base (4). In case of interference with the digital telephone base (4), the frequency of the local oscillator (12) of the tuner (1) is shifted by one or more synthesis intervals after scanning of an error indicator (32) situated in the demodulator (3). This method makes it possible to insert a digital telephone base into an STB while circumventing disturbances in the operation of the STB when this base is transmitting.

**Published:**

- *with international search report*
- *with amended claims*

(88) Date of publication of the revised international search report: 2 June 2005

Date of publication of the amended claims: 28 April 2005

(15) Information about Correction:

see PCT Gazette No. 22/2005 of 2 June 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.